





Features

- < High Efficiency Scroll Compressors
- < Stainless steel, copper brazed plate heat exchangers
- < Multi-circuit cupronickel heat exchanger
- < Compact design
- < Stainless steel drain pan/base
- < Low and high refrigerant pressure access ports
- < Low and high refrigerant pressure safety switches
- < Unit mounted electrical component enclosure
- < All units are precharged and fully run tested
- < Solid state digital temperature controllers
- < Available in 208/230-3-60, 460-3-60, 220-3-50 and 380/415-3-50
- < Available in cooling only or reverse cycle configuration

		AC10D	A10DK	AC10E	A10EK
Capacity	BTU/H	120,000			
	Kcal/H	30,000			
Nominal Tons		10			
Length	inches	27.00			
	mm	686			
Width	inches	17.50			
	mm	445			
Height	inches	31			
	mm	788			
Weight	lbs	350			
	kg	159			
Power Supply		208-3-60	220-3-50	460-3-60	380-3-50
Amp Draw		27.0	30.4	13.4	15.2
Power	Watts	7,770	8,050	7,770	8,050
Minimum Chillwater Flow Rate	GPM	24			
	LPM	91			
Chillwater Inlet/Outlet		1-5/8" OD Male hose connection			
Minimum Seawater Flow Rate	GPM	40			
	LPM	152			
Seawater Inlet/Outlet		1-5/8" OD Male hose connection			

i:\wordpfct\80967.wpd

AQUA-AIR MANUFACTURING, division of the James D. Nall Co., Inc.
1050 East 9th Street, Hialeah, Florida 33010 U.S.A.
Ph. 305-884-8363 Fax 305-883-8549 Email sales@aquair.com

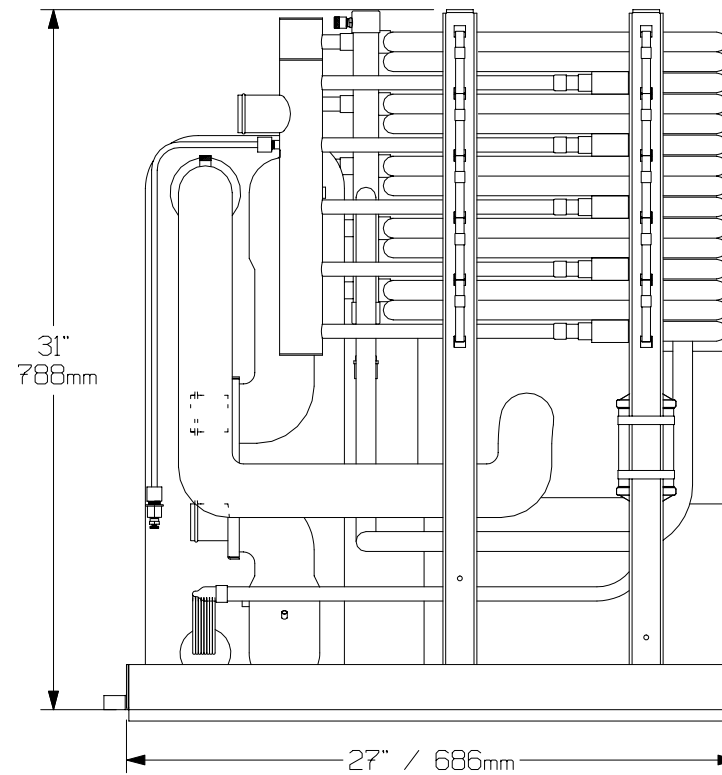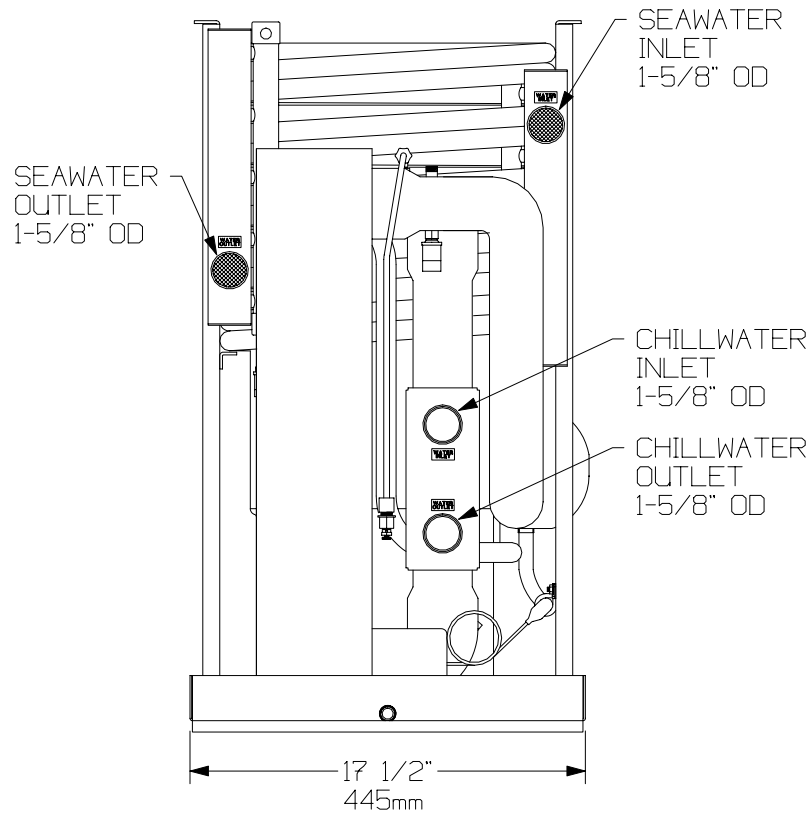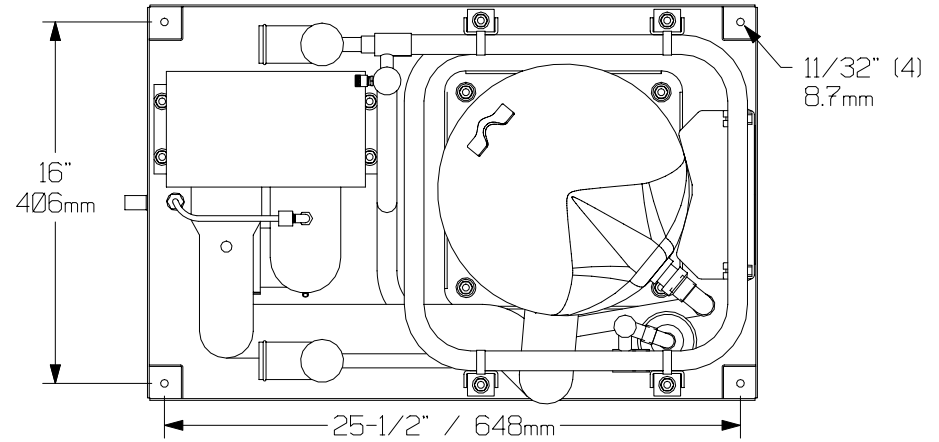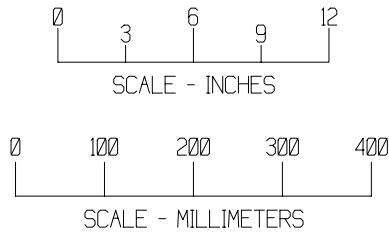

AQUA-AIR MARINE AIR CONDITIONING SYSTEMS		AC10 CHILLER UNIT	
DRAWING NUMBER	AC10-1	DRAWN BY	DN
		DATE	2-14-03
SCALE	FULL	APPROVED BY	REVISION DATE
			REV A