


Standard Features

- C Large capacity centrifugal type for extended, quiet operation
- C Wetted components constructed of high quality non-corrosive materials,
- C Built in thermal overload protection
- C AC motors are Ignition protected
- C Threaded intake and discharge ports are U.S. standard taper pipe thread (NPT)
- C Approved by ABYC, USCG, CE, and ARI

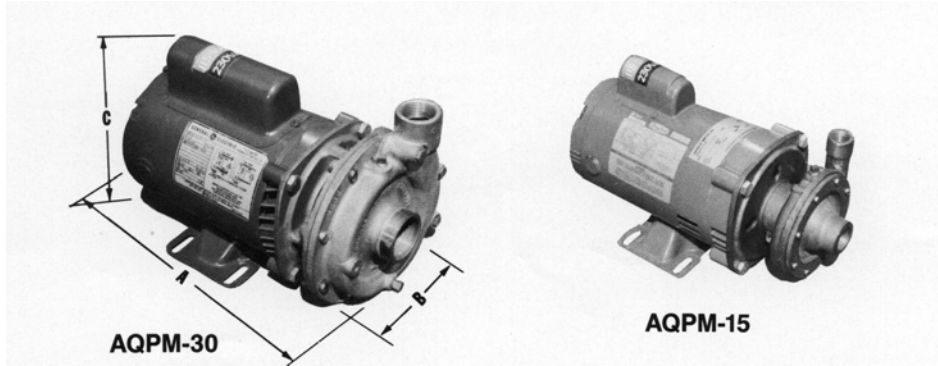

TECHNICAL SPECIFICATIONS				
	AQPM-15	AQPM-15L	AQPM-30	AQPM-30L
VOLTAGE	115 / 230			
PHASE	1			
HZ.*	50 / 60	60	50 / 60	60
AMPS	10.0 / 5.0	8.6 / 4.3	10.0 / 5.0	
WATTS	737		944	
WEIGHT	28 LBS		32 LBS	
INLET SIZE	3/4" FPT		1-1/4" FPT	
OUTLET SIZE	1/2" FPT		1" FPT	
LENGTH (A)	12-1/4"			
WIDTH (B)	6-1/2"			
HEIGHT (C)	6-5/8"			
RATED CAPACITY	1320 GPH @ 6' HEAD		3000 GPH @ 20' HEAD	

Pumps operated on 50 Hz will experience a 17% decrease in flow rate and a 31% decrease in total head

I:WORDPFCT\80082.WPD

AQUA-AIR MANUFACTURING, division of the James D. Nall Co., Inc.
 1050 East 9th Street, Hialeah, Florida 33010 U.S.A.
 Ph. 305-884-8363 Fax 305-883-8549 Email sales@aquair.com